

FACE MO N CHO K BA IE EC IFIE	- 20 200 -5.0 A
DO-214AC/ MA	F
<p style="text-align: center;">Dimensions in inches and (millimeters)</p>	F ◀ F ◀ F ◀ B - , ◀ L ◀ H ◀ H 250°C/10 M D C : M : M 2026 , : P : 0.0023 : A , 0.07 MIL- D-750,

A E C
25°C 20% - 60H ,

	SYMBOLS	52	54	56	58	510	515	520	I
M		20	40	60	80	100	150	200	
M M		14	28	42	56	70	105	140	
M DC	dc	20	40	60	80	100	150	200	
M =100°C	I(A)	5.0							A
P , 8.3	I _F	120.0							A
M 5.0A	F	0.55	0.70	0.85	0.95				
M DC A=25°C DC A=125°C	I	0.5 50		0.05 10			mA		
	J _A	80.0							°C/
O	J	-55 +150							°C
	G	-55 +150							°C

Ratings And Characteristic Curves

FIG. 1- DERATING CURVE OUTPUT RECTIFIED CURRENT

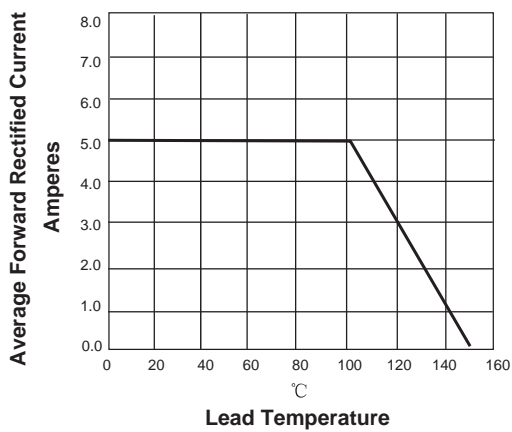


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG

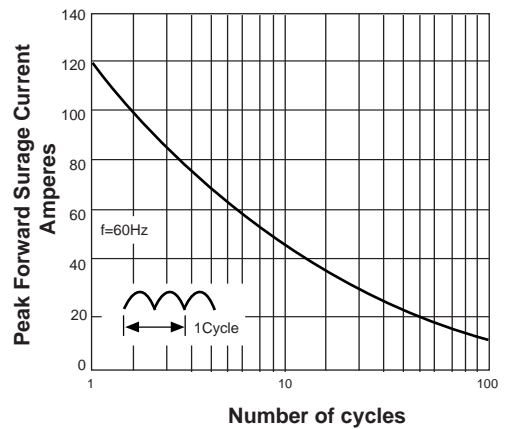


FIG. 3-TYPICAL FORWARD VOLTAGE CHARACTERISTICS

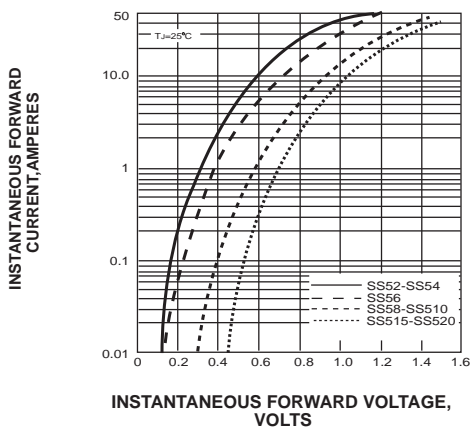


FIG. 4-TYPICAL REVERSE LEAKAGE CHARACTERISTICS

