




1200V
75A



- Motor Drivers
- AC and DC servo drive amplifier
- UPS (Uninterruptible Power Supplies)

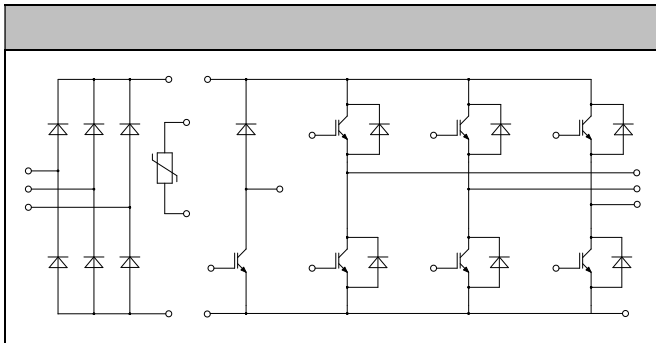

- Low switching losses
- Low $V_{ce(sat)}$ with positive temperature coefficient
- Including fast & soft recovery anti-parallel FWD
- Low inductance case
- High short circuit capability(10us)
- Maximum junction temperature 175°C

Collector-Emitter Voltage	V_{CES}	$V_{GE}=0V, I_C=1mA, T_{vj}=25^{\circ}C$	1200	V
Continuous Collector Current	I_C	$T_c=80^{\circ}C, T_{vjmax}=175^{\circ}C$	75	A
Repetitive Peak Collector Current	I_{CRM}	$t_p=1ms$	150	A
Gate-Emitter Voltage	V_{GES}	$T_{vj}=25^{\circ}C$	± 20	V
Total Power Dissipation	P_{tot}	$T_c=25^{\circ}C$ $T_{vjmax}=175^{\circ}C$	476	W

Gate-emitter Threshold Voltage	$V_{GE(th)}$	$V_{GE}=V_{CE}, I_C=3mA, T_{vj}=25^\circ C$	5.0	5.8	6.5	V	
Collector-Emitter Cut-off Current	I_{CES}	$V_{CE}=1200V, V_{GE}=0V, T_{vj}=25^\circ C$			1.0	mA	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=75A, V_{GE}=15V, T_{vj}=25^\circ C$		1.85	2.15	V	
		$I_C=75A, V_{GE}=15V, T_{vj}=125^\circ C$		2.05			
		$I_C=75A, V_{GE}=15V, T_{vj}=150^\circ C$		2.10			
Gate Charge	Q_G			0.85		μC	
Input Capacitance	C_{ies}	$V_{CE}=25V, V_{GE}=0V,$ $f=1MHz, T_{vj}=25^\circ C$		4.20		nF	
Reverse Transfer Capacitance	C_{res}			0.32		nF	
Gate-Emitter leakage current	I_{GES}	$V_{CE}=0V, V_{GE}=20V, T_{vj}=25^\circ C$			400	nA	
Turn-on Delay Time	$t_{d(on)}$	$I_C=75A$ $V_{CE}=600V$ $V_{GE}=\pm 15V$ $R_G=5.1\Omega$ $T_{vj}=25^\circ C$		100		ns	
Rise Time	t_r			78		ns	
Turn-off Delay Time	$t_{d(off)}$			380		ns	
Fall Time	t_f			32		ns	
Energy Dissipation During Turn-on Time	E_{on}			5.6		mJ	
Energy Dissipation During Turn-off Time	E_{off}			3.6		mJ	
Turn-on Delay Time	$t_{d(on)}$		$I_C=75A$ $V_{CE}=600V$ $V_{GE}=\pm 15V$ $R_G=5.1\Omega$ $T_{vj}=125^\circ C$		110		ns
Rise Time	t_r				85		ns
Turn-off Delay Time	$t_{d(off)}$				450		ns
Fall Time	t_f				36		ns
Energy Dissipation During Turn-on Time	E_{on}			8.8		mJ	
Energy Dissipation During Turn-off Time	E_{off}			6.4		mJ	
SC Data	I_{sc}	$T_p \leq 10\mu s, V_{GE}=15V, T_{vj}=150^\circ C,$ $V_{cc}=900V, V_{CEM} \leq 1200V$			370		A

Repetitive Peak Reverse Voltage	V_{RRM}	$T_{vj}=25^{\circ}C$	1200	V
Continuous DC Forward Current	I_F		75	A
Repetitive Peak Forward Current	I_{FRM}	$t_p=1ms$	150	A
I ² t-value	I ² t	$V_R=0, t_p=10ms, T_{vj}=125^{\circ}C$	810	A ² s
		$V_R=0, t_p=10ms, T_{vj}=150^{\circ}C$	690	

Forward Voltage	V_F	$I_F=75A, T_{vj}=25^{\circ}C$		2.20	2.60
		$I_F=75A, T_{vj}=125^{\circ}C$		2.25	
		$I_F=75A, T_{vj}=150^{\circ}C$		2.25	
Recovered Charge	Q_{rr}	$I_F=75A$		4.2	
Peak Reverse Recovery Current	I_{rr}	$V_R=600V$ $-di_F/dt=900A/us$		75	
Reverse Recovery Energy	E_{rec}	$T_{vj}=25^{\circ}C$		2.06	
Recovered Charge	Q_{rr}	$I_F=75A$		9.6	
Peak Reverse Recovery Current	I_{rr}	$V_R=600V$ $-di_F/dt=900A/us$		92	
Reverse Recovery Energy	E_{rec}	$T_{vj}=125^{\circ}C$		4.34	

Collector-Emitter Voltage	V_{CES}	$V_{GE}=0V, I_C=1mA, T_{vj}=25^\circ C$	1200	V
Continuous Collector Current	I_C	$T_c=100^\circ C, T_{vjmax}=175^\circ C$	50	A
Repetitive Peak Collector Current	I_{CRM}	$t_p=1ms$	100	A
Gate-Emitter Voltage	V_{GES}	$T_{vj}=25^\circ C$	± 20	V
Total Power Dissipation	P_{tot}	$T_c=25^\circ C$ $T_{vjmax}=175^\circ C$	442	W

Gate-emitter Threshold Voltage	$V_{GE(th)}$	$V_{GE}=V_{CE}, I_C=1.7mA, T_{vj}=25^\circ C$	5.0	5.7	6.5	V
Collector-Emitter Cut-off Current	I_{CES}	$V_{CE}=1200V, V_{GE}=0V, T_{vj}=25^\circ C$			1.0	mA
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=50A, V_{GE}=15V, T_{vj}=25^\circ C$		1.90	2.25	V
		$I_C=50A, V_{GE}=15V, T_{vj}=125^\circ C$		2.25		
		$I_C=50A, V_{GE}=15V, T_{vj}=150^\circ C$		2.35		
Gate Charge	Q_G			0.35		μC
Input Capacitance	C_{ies}	$V_{CE}=25V, V_{GE}=0V,$ $f=1MHz, T_{vj}=25^\circ C$		2.60		nF
Reverse Transfer Capacitance	C_{res}			0.10		nF
Gate-Emitter leakage current	I_{GES}	$V_{CE}=0V, V_{GE}=20V, T_{vj}=25^\circ C$			400	nA
Turn-on Delay Time	$t_{d(on)}$	$I_C=50A$ $V_{CE}=600V$ $V_{GE}=\pm 15V$ $R_G=15\Omega$ $T_{vj}=25^\circ C$		168		ns
Rise Time	t_r			34		ns
Turn-off Delay Time	$t_{d(off)}$			320		ns
Fall Time	t_f			78		ns
Energy Dissipation During Turn-on Time	E_{on}			5.42		mJ
Energy Dissipation During Turn-off Time	E_{off}			4.15		mJ



Turn-on Delay Time	$t_{d(on)}$	$I_C = 50\text{ A}$ $V_{CE} = 600\text{ V}$ $V_{GE} = \pm 15\text{ V}$ $R_G = 15\Omega$ $T_{vj} = 125^\circ\text{C}$	175	ns
Rise Time	t_r		42	ns
Turn-off Delay Time	$t_{d(off)}$		426	ns
Fall Time	t_f		148	ns
Energy Dissipation During Turn-on Time	E_{on}		7.26	mJ
Energy Dissipation During Turn-off Time	E_{off}		5.80	mJ
SC Data	I_{sc}	$T_p \leq 10\mu\text{s}, V_{GE} = 15\text{ V}, T_{vj} = 150^\circ\text{C},$ $V_{cc} = 900\text{ V}, V_{CEM} \leq 1200\text{ V}$	260	A

Repetitive Peak Reverse Voltage	V_{RRM}	$T_j = 25^\circ\text{C}$	1200	V
Continuous DC Forward Current	I_F		35	A
Repetitive Peak Forward Current	I_{FRM}	$t_p = 1\text{ ms}$	70	A
I ² t-value	I^2t	$V_R = 0, t_p = 10\text{ ms}, T_j = 125^\circ\text{C}$	240	A ² s
		$V_R = 0, t_p = 10\text{ ms}, T_j = 150^\circ\text{C}$	220	

Forward Voltage	V_F	$I_F = 35\text{ A}, T_{vj} = 25^\circ\text{C}$	1.95	V
		$I_F = 35\text{ A}, T_{vj} = 125^\circ\text{C}$	1.95	
		$I_F = 35\text{ A}, T_{vj} = 150^\circ\text{C}$	1.90	
Recovered Charge	Q_{rr}	$I_F = 35\text{ A}$	4.15	μC
Peak Reverse Recovery Current	I_{rr}	$V_R = 600\text{ V}$ $-di_F/dt = 1600\text{ A}/\mu\text{s}$	42	A
Reverse Recovery Energy	E_{rec}	$T_{vj} = 25^\circ\text{C}$	1.30	mJ
Recovered Charge	Q_{rr}	$I_F = 35\text{ A}$	8.00	μC
Peak Reverse Recovery Current	I_{rr}	$V_R = 600\text{ V}$ $-di_F/dt = 1600\text{ A}/\mu\text{s}$	46	A
Reverse Recovery Energy	E_{rec}	$T_{vj} = 125^\circ\text{C}$	2.38	mJ

Repetitive Peak Reverse Voltage	V_{RRM}	$T_j=25^\circ\text{C}$	1600	V
Average output Current 50/60Hz, sine wave	$I_{F(AV)}$	$T_c=100^\circ\text{C}$	80	A
Maximum RMS Current at Rectifier Output	I_{RMSM}	$T_c=100^\circ\text{C}$	120	A
Surge Forward Current	I_{FSM}	$V_R=0, t_p=10\text{ms}, T_j=45^\circ\text{C}$	1100	A
I^2t -value	I^2t	$V_R=0, t_p=10\text{ms}, T_j=45^\circ\text{C}$	6050	A^2s

Diode Forward Voltage	V_F	$I_F=50\text{A}, T_j=125^\circ\text{C}$	0.98		V
Reverse Current	I_R	$T_j=125^\circ\text{C}, V_R=1600\text{V}$		2.0	mA

Rated Resistance	R_{25}		5.0		$\text{k}\Omega$
Deviation of R100	R/R	$T_c=100, R_{100}=493.3\Omega$	-5	5	%
Power Dissipation	P_{25}			20.0	mW
B-value	$B_{25/50}$	$R_2=R_{25}\exp[B_{25/50}(1/T_2-1/(298.15\text{K}))]$	3375		K

Isolation voltage	V_{isol}	$t=1\text{min}, f=50\text{Hz}$	2500			V
Maximum Junction Temperature □	T_{jmax}				175	°C
Operating Junction Temperature	$T_{vj\text{op}}$		-40		150	°C
Storage Temperature	T_{stg}		-40		125	°C
Stray-inductance-module	L_{SCE}			60		nH
Module lead resistance, terminals-chip	$R_{cc'+EE'}$	$T_C=25^\circ\text{C}$, per switch		4.0		mΩ
	$R_{AA'+CC'}$			3.0		
Thermal Resistance Junction-to Case	$R_{\theta JC}$	per IGBT-inverter			0.339	K/W
		per Diode-inverter			0.619	
		per IGBT-brake-copper			0.500	
		per Diode-chopper			1.266	
		per Diode-rectifier			0.635	
Thermal Resistance Case-to Sink	$R_{\theta CS}$	per IGBT-inverter		0.121		K/W
		per Diode-inverter		0.221		
		per IGBT-brake-copper		0.180		
		per Diode-chopper		0.452		
		per Diode-rectifier		0.227		
		per Module		0.009		
Mounting Force Per Clamp	F		3.0		6.0	N
Weight of Module	G			300		g

